


UNAPRED NAPUNJENA IPX8 - CILINDRIČNA RAPID JOINT

Radijalna spojka sa gelom, unapred napunjena, za kablove sa ekstrudovanom izolacijom do 1 kV.

Izrađeno od samogasivog materijala, otpornog na plamen, za kablove sa radnom temperaturom do 90°C. Radijalni sistem zatvaranja olakšava montažu spojnice, čineći je ponovo otvorem samo pomoću alata.

PREDNOSTI

- Za ravno povezivanje (Linijsko).
- Sa odgovarajućim distancerima.
- Za sve tipove primene, uključujući i podvodnu.
- Jedna spojica-za više modela kablova
- Unapred napunjena gelom koji nije klasifikovan kao opasan prema CLP direktivi i nema rok trajanja.

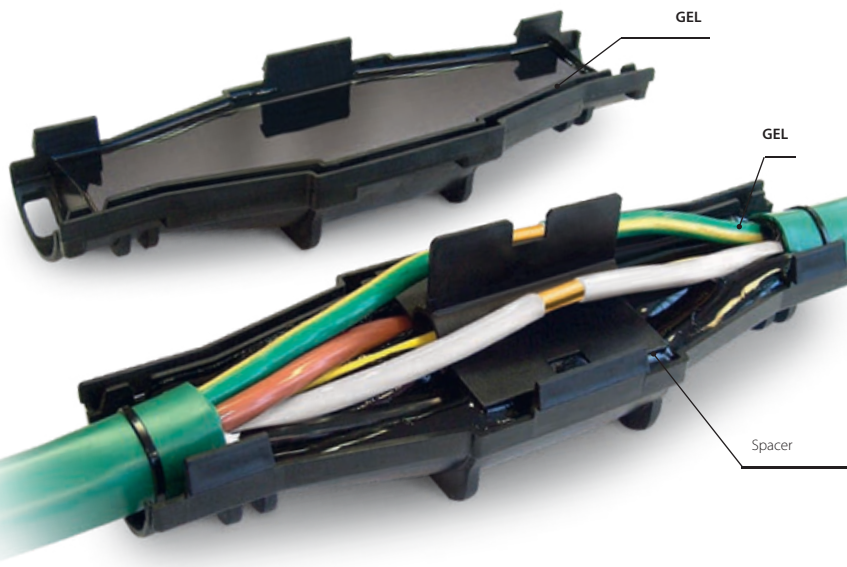

For **COPPER**
cables

PRODUCT / Item	Cable formation and conductor cross sections (n° x mm ²)				With fiber-optic separator 4x	Dimension (mm)
	1x	2x	3x	4x		
RAPID JOINT L6 301098-037	1,5 - 50	1,5 - 10	1,5 - 10	1,5 - 6	-	105 x 55
RAPID JOINT L10 301098-004	2,5 - 150	2,5 - 25	2,5 - 16	2,5 - 16	-	180 x 60
RAPID JOINT L25 301098-006	120 - 240	6 - 50	6 - 35	4 - 35	-	210 x 65
RAPID JOINT L95 301098-003	185 - 400	35 - 95	25 - 70	25 - 70	16 - 50	320 x 100

For **ALUMINIUM**
cables

	1x	2x	3x	4x	4x	(mm)
RAPID JOINT L25 301098-006	120 - 150	16 - 35	10 - 25	10 - 25	-	210 x 65
RAPID JOINT L95 301098-003	185 - 400	35 - 95	25 - 70	25 - 70	16 - 50	320 x 100

Električne karakteristike: • CEI EN 50393
sa konektorima

U skladu sa EN 61238-1

• Klasa 2 u skladu sa CEI 64-8.

🔧 Gel: UL 94-HB 

🔧 Casing mix: UL 94-V2

🌡️ Radna temperatura: 90°C

🌡️ Temperatura montaže: -40°C do +50°C

🌊 Potpuno podvodna

🔑 Može se koristiti pod zemljom

🌿 Halogen-free Gel

🔥 Bez širenja plamena: CEI 20-35 • IEC 60332-1 • HD 405-1 (kada je primenljivo)

● Stepen zaštite: IPX8




Joint supplied with armour continuity device



RAPID JOINT S/ARM

Za oklopljene (širmovane) kablove

PRODUCT / Item	Cable formation and conductor cross sections (n° x mm2)				With fiber-optic separator 4x	Dimension (mm)
	1x	2x	3x	4x		
RAPID JOINT L 10-S 301098-035	2,5 - 120	2,5 - 10	2,5 - 10	2,5 - 10	-	180 x 60
RAPID JOINT L 25-S 301098-036	120 - 185	16 - 25	10 - 25	10 - 25	-	210 x 65
RAPID JOINT L 95-S 301098-012	240 - 400	35 - 95	25 - 70	25 - 70	16 - 50	320 x 100




For ARMoured cables	1x	2x	3x	4x	(mm)
RAPID JOINT L 10-ARM 301098-10ARM	2,5 - 10	2,5 - 10	2,5 - 10	-	180 x 60
RAPID JOINT L 25-ARM 301098-25ARM	16 - 25	10 - 25	10 - 25	-	210 x 65
RAPID JOINT L 95-ARM 301098-016	35 - 95	25 - 70	25 - 70	16 - 50	320 x 100

RAPID JOINT LS

For signalling and control cables.


PRODUCT Item	Conductors (mm2)	Cable formation (n° conduttori)								Dimension (mm)
		5x	7x	10x	12x	16x	19x	24x	40x	
RAPID JOINT-LS1 301098-018	1,5 2,5	• •	• •	• •	• •	• •	• •	• •	• •	180 x 60
RAPID JOINT-LS2 301098-019	1,5 2,5				• •	• •	• •	• •	• •	210 x 65
RAPID JOINT-LS3 301098-020	1,5 2,5					• •	• •	• •	• •	320 x 100



RAPID JOINT T



Pravolinijske spojnice za telefonske kablove.

UNScreened	SCREENED	N° pairs for conductor cross sections (n° x mm2)	Dimension (mm)
PRODUCT / Item	PRODUCT / Item		
RAPID JOINT-T26 301098-021	RAPID JOINT-TS26 301098-024	(1 - 26) x (0,5 - 0,6)	180 x 60
RAPID JOINT-T61 301098-022	RAPID JOINT-TS61 301098-025	(30 + 1 - 64 + 1) x (0,5 - 0,6)	210 x 65
RAPID JOINT-T101 301098-023	RAPID JOINT-TS101 301098-026	(60 + 1 - 100 + 1) x (0,5 - 0,6)	320 x 100




RAPID JOINT SYSTEM FAST RP

Straight joint + Shear bolt connectors.

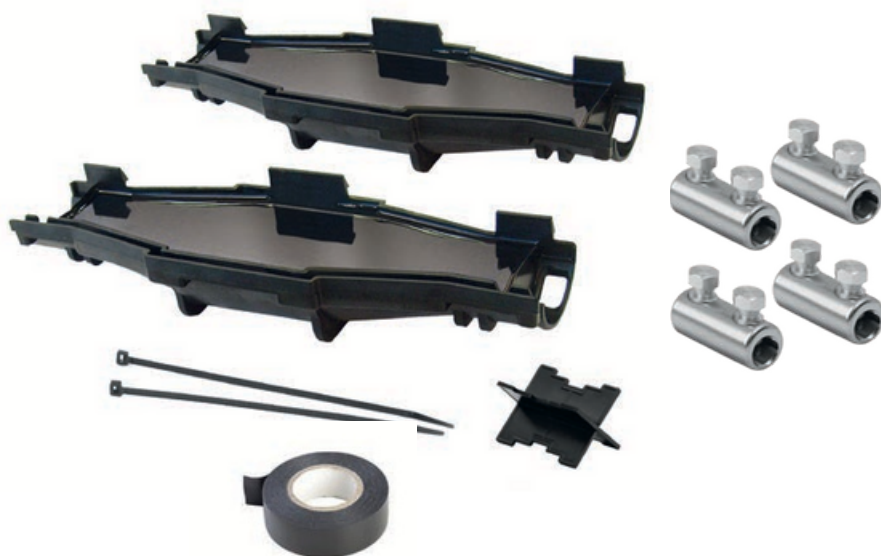

PRODUCT / Item	Cable formation from 2x a 4x (n° x mm ²)	Dimension (mm)
RAPID JOINT L 10 RP RAPIDJL10RP	1,5 - 10	180 x 60
RAPID JOINT L 25 RP RAPIDJL25RP	10 - 25	210 x 65
RAPID JOINT L 95 RP RAPIDJL95RP	35 - 95	320 x 100

Shear bolt connectors

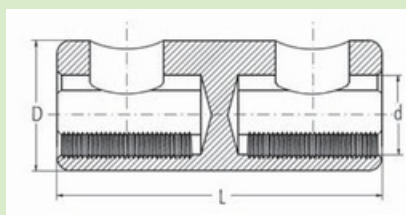

PRODUCT / Item	Aluminium cross sections* (mm ²)	Copper cross sections (mm ²)	Breakaway torque (Nm)	Dimension L D d (mm)		
RAY-TTF 1,5/16 RAY-TTF1,5/16	10 - 16	1,5 - 16	4	30	12	6,1
RAY-TTF 10/35 RAY-TTF10/35	10 - 35	10 - 35	10	36	16	9,0
RAY-TTF 25/50 RAY-TTF25/50	25 - 50	25 - 50	12	36	18	10,0
RAY-TTF 35/150 RAY-TTF35/150	35 - 150	35 - 150	30	70	28	17,0

* For round conductors.