


PIT oe USB

402313

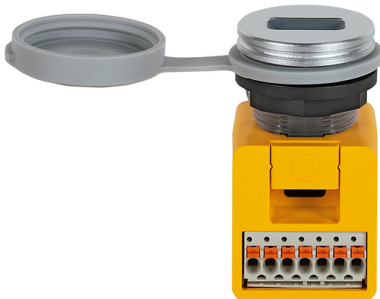

USB interface can be activated

Technical details

General data	
Approval:	CE, UKCA, UL Recognized Component
Technical data	
Inputs	
DC voltage at input:	24 V DC
Galv. isolation input:	Yes
USB interface	
Number of USB host interfaces:	1
Type of USB host interface:	USB 2.0 Type A
Environmental data	
Climatic suitability to ...:	EN 60068-2-2, EN 60068-2-1
Ambient temperature standard:	EN 60068-2-14
Ambient temperature:	-30 - 60 °C
Climatic suitability standard:	EN 60068-2-78
Humidity rating:	93 % r. h. at 40 °C
Perm. operating height ASL:	2000 m
EMC to standard ...:	EN 61131-2 (Zone B)
Vibration to standard ...:	EN 60068-2-6
Acc. shock to standard1:	15g
Clearance & creepage dist. to:	EN 61131-2

Overvoltage category:	II
Pollution degree clear.&creep.:	2
Protection type standard:	EN 60529
Protection type, housing:	IP20
Mechanical data	
Mounting position:	any
Max. cable length:	30 m
Connection terminal:	Spring-loaded terminal, plugin
Terminal style:	plug-in
Width dimension:	31.2 mm
Depth dimension:	55 mm
Net weight:	30 g
Gross weight:	67 g
Environment	
WEEE classification (08/2018):	5 devices (feed size < 50cm)
Commercial data	
ECLASS version:	ECLASS-13
ECLASS Reference Feature:	27371292
ETIM Version:	ETIM-9.0
ETIM Reference Group:	EG000017
ETIM Reference Feature:	EC002024
UNSPSC 25:	39122205
GTIN:	4046548103069
Volume:	0 dm3
Harmonized System Code:	85389099
Type of tariff number:	TARIC
Use of customs tariff number:	Ausfuhr, Einfuhr
Quantity per packaging unit:	1