


PIT oe ETH 5V

402315

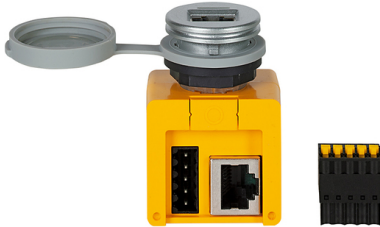

Activatable Ethernet interfaces (RJ45), supply and input voltage 5 V

Technical details

General data	
Approval:	CE, UKCA, UL Recognized Component
Technical data	
Electrical data	
Supply voltage (V):	5 - 5 V
Type of supply voltage U1:	DC
Power consumption DC:	0.3 W
Inputs	
Number of inputs:	2
Galv. isolation input:	No
Ethernet interface	
Connector type ETHERNET int.:	RJ45
Ethernet transmission rate:	10/100 Mbit/s
Number of Ethernet interfaces:	2
Environmental data	
Climatic suitability to ...:	EN 60068-2-2
Ambient temperature:	-20 - 60 °C
Climatic suitability standard:	EN 60068-2-78
Humidity rating:	93 % r. h. at 40 °C
Condensation permitted?:	Not permitted

EMC to standard ...:	EN 61131-2 (Zone B)
Vibration to standard ...:	EN 60068-2-6
Clearance & creepage dist. to:	EN 61131-2
Overvoltage category:	II
Pollution degree clear.&creep.:	2
Protection type, housing:	IP20
Mechanical data	
Mounting position:	any
Max. cable length:	30 m
Connection terminal:	Spring-loaded terminal, plugin
Height dimension:	40 mm
Width dimension:	30 mm
Depth dimension:	59.2 mm
Net weight:	42 g
Gross weight:	62 g
Environment	
WEEE classification (08/2018):	6 small IT-/communic. device
Commercial data	
ECLASS version:	ECLASS-13
ECLASS Reference Feature:	27371292
ETIM Version:	ETIM-9.0
ETIM Reference Group:	EG000017
ETIM Reference Feature:	EC002024

Optional accessories



402325

PIT or DIN rail adapter