

PA 10 B 510

Photoelectric Amplifier

Remote Photoelectric Systems




Product Data	
Function	Amplifier
Supply Voltage	230 V ac
Sensing Range	60 m
Output	Relay
Sensitivity Adjustment	Manual
Housing	11-pole DIN socket

Technical Data	
Supply Voltage	230 V ac
Voltage Tolerance	+/- 15 %
Current Consumption	Max. 3,2 VA
Response Time t_{on} / t_{off} , Relay	50 ms / 50 ms
Output, Relay	1 open/1 close, 250 V ac/3 A, 120 V ac/5 A
Power On Indicator	Green LED
Output Indicator	Red LED
Hysteresis	Approx. 40 %
Operation Frequency, Relay	10 Hz
Housing Material	Noryl

Environmental Data	
Operation Temperature	- 10 to +50 °C
Storage Temperature	- 40 to +80 °C
Sealing Class	IP 40

Approvals	

Wiring Diagram

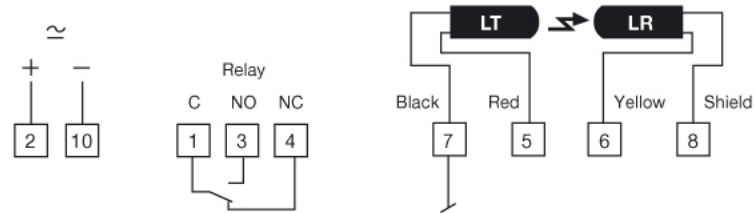

Relay output

Dimensions

