

LR 100L TP38 T3

Remote Sensors

Remote Photoelectric Systems

Compatible Transmitter:

LT 100L TP38 T3



Product Data	
Function	Receiver
Connection	3 pin, M8 plug
Sensing Range	Up to 18 m
Indicators	Yes
Optical Angle	+/- 7° (opening)
Housing Material	Plastic
Housing	M12 x 1


Technical Data	
Photo Transistor	Silicon NPN
Power On Indicator	Green LED
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Polycarbonate
Cable	2 x 0,25 mm²
Cable Sleeve	PVC Ø 4,0 mm
Min. Cable Bending Radius	45 mm

Environmental Data	
Vibration	10 – 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	– 25 to +65 °C
Storage Temperature	– 40 to +80 °C
Sealing Class	IP 67
Light Immunity 20°	> 80 000 lux

Approvals




Wiring Diagram

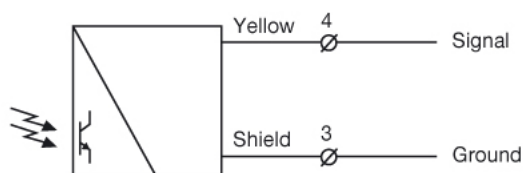


Connections


3 pin, M8

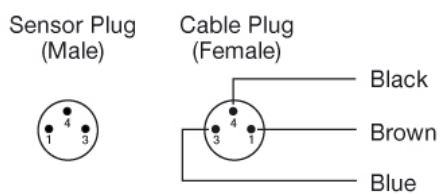


Parallel Displacement

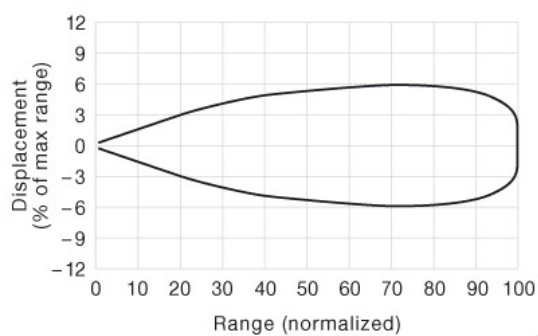

Series 100



Angular Displacement

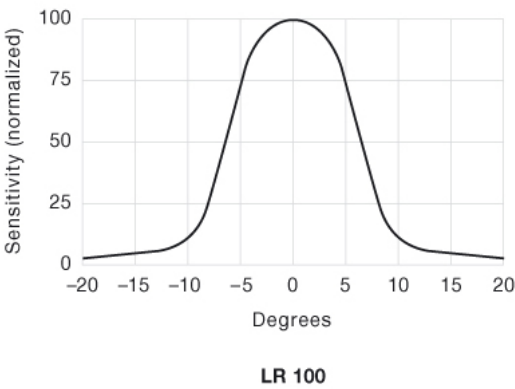

Dimensions

